OPERATION OF SINGLE KEY ILD

UN-LOCK

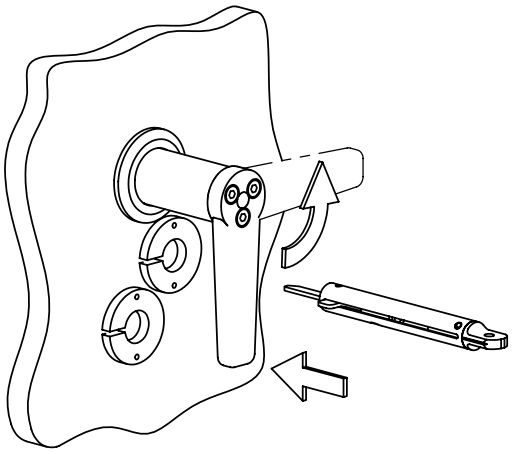

1. ROTATE HANDLE 90° CCW & INSERT KEY

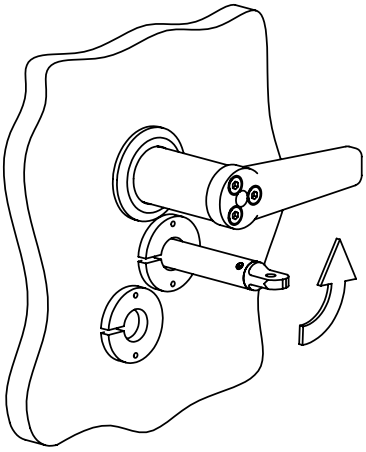

2. ROTATE KEY 180° CCW
(NOTE: KEY CANNOT BE REMOVED)

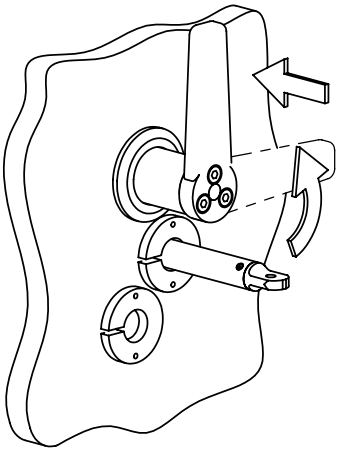

3. PUSH IN HANDLE UNTIL IT STOPS
& ROTATE HANDLE 90° CCW TO
DISENGAGE LOCKING BOLT

LOCK

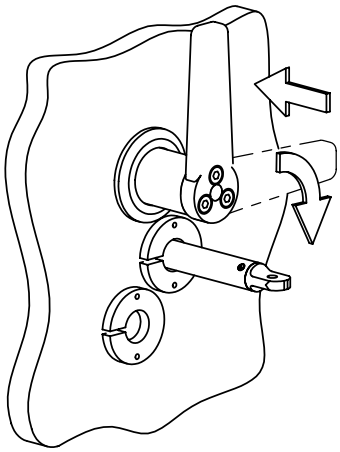

1. PUSH IN HANDLE & ROTATE HANDLE
90° CW TO ENGAGE LOCKING BOLT

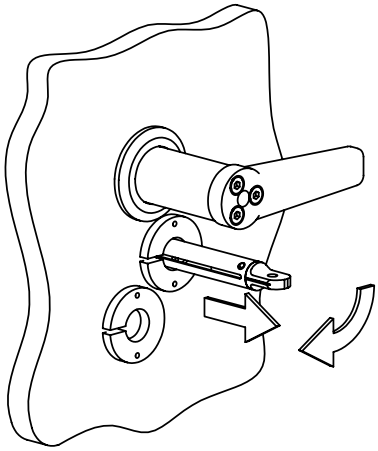

2. ROTATE KEY 180° CW &
REMOVE KEY TO SECURE LOCK

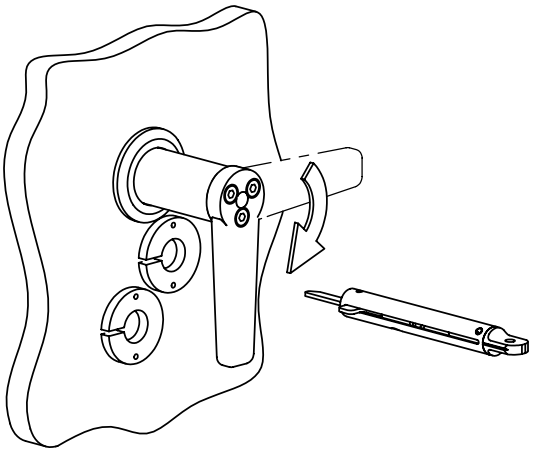

3. ROTATE HANDLE 90° CW

Installation coordinator (805-982-3558)
http://locks.nfesc.navy.mil